

UCM092A-UL-I / UCM092AB-UL-I

General Description

- The All-In-One faucet system is an elegant and European-designed touch-free automatic countertop mounted soap, water, and hand drying solution perfect for any high-traffic restroom.
- It is designed to avoid splashed water near the sink area, save space, and be highly-efficient for users when cleaning up in a restroom.
- The Saniflow® All-in-One faucet system is eco-friendly and produces a cost-savings margin of more than 73% compared to similar solutions on the market.
- The electric hand dryer designed to work with the system is the Machflow® Plus which has an adjustable power motor that regulates energy consumption (between 390 and 1,050W) and provides a maximum air output speed of 250 mph that dries your hands between 10-15 seconds.
- With a HEPA filter media as well as Ion Hygienic Technology to stop the spread of harmful bacteria in the air, this will be sure to dry hands in the most hygienic way possible.

Components & Materials

- **SENSOR OPERATED HAND DRYER:** based on one of our most successful hand dryers, the Machflow Plus M09A-UL-I, this countertop mounted hand dryer is capable of drying hands in just 10 seconds thanks to a pleasant jet of air that can reach speeds of 250 MPH. The tap is made of chrome-plated brass, with a bright finish or black finish.
- **SENSOR OPERATED WATER TAP AND SOAP DISPENSER:** made of chrome-plated brass, with a bright finish or black finish, this faucet dispenses water and soap from the same tap. The sensor placed just on the upper right side of the tap is in charge of dispensing soap whereas the sensor placed just above the water outlet is in charge of opening the valve, making the water come out.

Operation

- **SENSOR OPERATED HAND DRYER:** Place the hands under the tap. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow.
- **SENSOR OPERATED WATER TAP AND SOAP DISPENSER:** Place the hands under the tap. The tap will automatically dispense soap on the right side and water on the left side, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the tap.

Installation

- Verify all rough-in dimensions prior to installation. Hand dryers require a dedicated circuit and must be properly grounded. a GFCI (Ground fault circuit interrupter) is recommended.

Please mark the selected item



code

UCM092A-UL-I

material

chrome-brass

finish

bright



code

UCM092AB-UL-I

material

chrome-brass

finish

black

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: **1-877-222-9125** or visit our website at **www.saniflowcorp.com**

Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com

SENSOR WATER AND SOAP DISPENSER TAP

This touch-free tap dispenses both, soap and water, is entirely manufactured in chrome-brass with a bright finish or black finish, from the highest quality materials.

- It can work together with the sensor operated hand dryer or on its own.
- The touch-free automatic system of this faucet helps to optimize flow rate water and thereby supporting long-term ecological balance.
- The soap is contained in a plastic bottle of 0.4gal capacity, easy to be removed for refilling, and it is dosed by a high resistance anti-drip valve.
- The soap dose can be adjustable between 0.0001gal and 0.0005gal, in doses of 0.0001, 0.0003, 0.0004 or 0.0005gal.


Technical Specifications

SOAP DISPENSER	FAUCET
Power supply (adaptor) - 100-240V	Power supply (adaptor) - 100-240V
Frequency - 50/ 60 Hz	Frequency - 50/ 60 Hz
Battery life - 35,000-40,000 hand wash cycles (water + soap)	Battery life - 35,000-40,000 hand wash cycles (water + soap)
Sensor range - 2-10"	Sensor range - 2-10"
Security cut-off - none	Security cut-off - 60 sec
Recommended soap viscosity - 100-3,500 cps	Water pressure work range - 0,8-8 bars
Soap dose - 0.0001, 0.0003, 0.0004 or 0.0005gal	Water flow (at 3bar) - 1,32gal/min

Dimensions of the soap bottle:


Ø4 3/8" x 15 3/4"H

MOUNTING

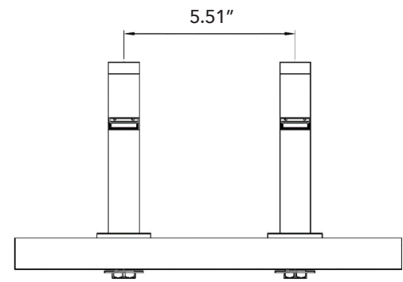

Sink must have a depth of at least 4.72", with vertical walls and not excessively rounded edges to avoid splashing.

SENSOR WATER AND SOAP DISPENSER TAP

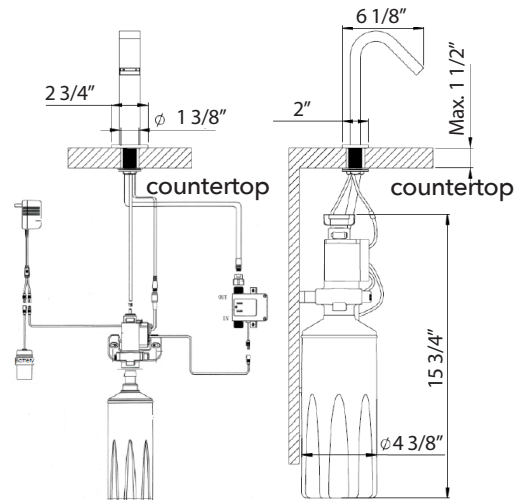

Job: _____

Model number: _____

Variations: _____

Architect / Engineer: _____

Contractor: _____

Customer / Wholesaler: _____

City / State / Country: _____

Date: _____

Quantity: _____

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: **1-877-222-9125** or visit our website at **www.saniflowcorp.com**
Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · **sales@saniflowcorp.com**